



भा.कृ.अनु.प. – केंद्रियरोपनफसलअनुसंधानसंस्थान  
ICAR-CENTRAL PLANTATION CROPS RESEARCH INSTITUTE  
(भारतियकृषिअनुसंधानपरिषद)  
(Indian Council of Agricultural Research)  
अनुसंधानकेंद्रकाहिकुचि, गुवाहाटि-७८१०१७, आसाम।  
Research Centre Kahikuchi, Guwahati – 781 017, Assam.



TeleFax:0361-2841785, Ph.0361-2840251, Email:sicrckahikuchi.cpcri@icar.gov.in&sickahikuchi@yahoo.com

F.No.4(20)2013-Petty Works


Dated: 22.11.2016

Notice Inviting Limited Tender

Sealed items rate tender are invited from the contractors/agencies having valid license/registration, PAN card etc. for the work mentioned below:

Sl.No.	Item of work	Estimated cost (Rs.)
1.	Extension of Existing Nursery Shade for Raising Plantation Seedlings at CPCRI, Research centre Kahikuchi, Guwahati, Assam.	Rs.2,58,138/-

The last date for receipt of the Limited Tender is 22.12.2016 at 3.00 PM. The Schedule for Limited Tender along with terms and conditions can be downloaded in the Institute website [www.cpcri.gov.in](http://www.cpcri.gov.in).

  
22/11/16.  
Scientist-in-charge.





भा.कृ.अनु.प. – केंद्रियरोपनफसलअनुसंधानसंस्थान  
ICAR-CENTRAL PLANTATION CROPS RESEARCH INSTITUTE  
(भारतियकृषिअनुसंधानपरिषद)  
(Indian Council of Agricultural Research)  
अनुसंधानकेंद्रकाहिकुचि, गुवाहाटि-७८१०१७, आसाम।  
Research Centre Kahikuchi, Guwahati – 781 017, Assam.



TeleFax:0361-2841785, Ph.0361-2840251, Email:sicrckahikuchi.cpcri@icar.gov.in&sickahikuchi@yahoo.com

NAME OF THE WORK: - EXTENSION OF EXISTING NURSERY SHADE FOR RAISING PLANTATION SEEDLING AT CPCRI ( R.S) KAHIKUCHI

TENDER SCHEDULE

Sl.No.	Description of the work	Unit	Qty.	Rate	Amount (Rs.)
1)	<b>Earth work in excavation</b> by mechanical means (Hydraulic excavator)/ manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil	Cumt	9.00		
2)	Providing and laying <b>cement concrete bed 1:4:8</b> , (1cement: 4 coarse sand:8 graded stone aggregate using 40 mm downsize jelly and clean sieved approved sand. and to the sides of the precast pillars. The rate shall include cost and conveyance of all materials, erecting the pillar to true plumb and alignment, consolidation, curing etc. complete as directed.	Cumt	8.22		



3)	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. up to floor five level, excluding cost of centering, shuttering, finishing and reinforcement : <b>1:1.5:3</b> (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cumt	2.16		
3 (A)	Providing and removing centering shuttering strutting propping etc and removal of form work <b>Columns, Pillars, Piers, Abutments, Posts and Struts</b>	Sq.mt.	45		
4)	Providing and <b>fabricating steel reinforcement</b> including straightening, cutting, bending, hooking, lapping wherever necessary placing in position, tying with binding wire including anchoring to the adjoining member wherever necessary as per design, drawing and specification. The rate shall include cost and conveyance of all materials transportation, cost of steel, fabrication etc complete as directed. (THERMO MECHANICALLY TREATED BARS)	Kgs	230		
5)	Providing and <b>plastering the wall surfaces</b> in CM 1:4 (1 cement: 4 coarse sand), 12 mm thick, using clean sieved approved sand with <b>TAPI/TROWEL FINISH</b> . The rate shall include cost and conveyance of all materials, scaffolding, labour, curing etc., complete	Sq.mt	46		
6)	Supplying and fixing 32mm <b>GI B class Pipes for vertical and horizontal GRID lines</b> , The work shall include , cutting threading, welding joining using coupling etc complete embedded in RCC pillars, 10 cms below top both direction but centered. The rate shall include cost and conveyance of all materials, coupling, bends, 'T' wherever necessary as per plan and design etc as directed.	Rmt	250		
	<b>Painting Steel work</b> with Deluxe Multi Surface Paint to give an even				



7)	shade. Two or more coat applied @ 0.90 ltr/ 10 sqm over an under coat of Zinc chromatic primer applied @ 0.80 ltr/ 10 sqm of approved brand and manufacture	Sqmt	25		
8)	Providing and <b>applying White washing</b> with lime to give an even shade to the plastered surfaces using best quality super white lime powder , synthetic adhesive and blue pigment as per instruction of Engineer New work (three or more coats)	Sqmt	46.00		
9)	Providing and fixing in position 50% cut off green HDPE woven retractable shade net with all edge stitching with plastic tape including all G.I wires, , nylon, ropes etc complete as per directions to cover top and side portions of Nursery extension	Sqmt	631		
10)	Providing and fixing 10 gauge G.I Wire rope for tying to G.I pipe to 30 cm c/c for both direction for fixing shade net . all as per direction	KG	280		
	Total in RS				

Amount in words


I AGREE TO UNDERTAKE THE WORK AS PER THE RATES QUOTED ABOVE AND AS PER THE TERMS AND CONDITIONS ENCLOSED ALONG WITH THIS TENDER SCHEDULE

Place  
Date:

Signature  
NAME OF THE CONTRACTOR  
FULL ADDRESS WITH PHONE NO



# EXTENSION OF EXISTING NURSERY SHADE FOR RAISING PLANTATION SEEDLING AT CPCRI ( R.S) KAHIKUCHI

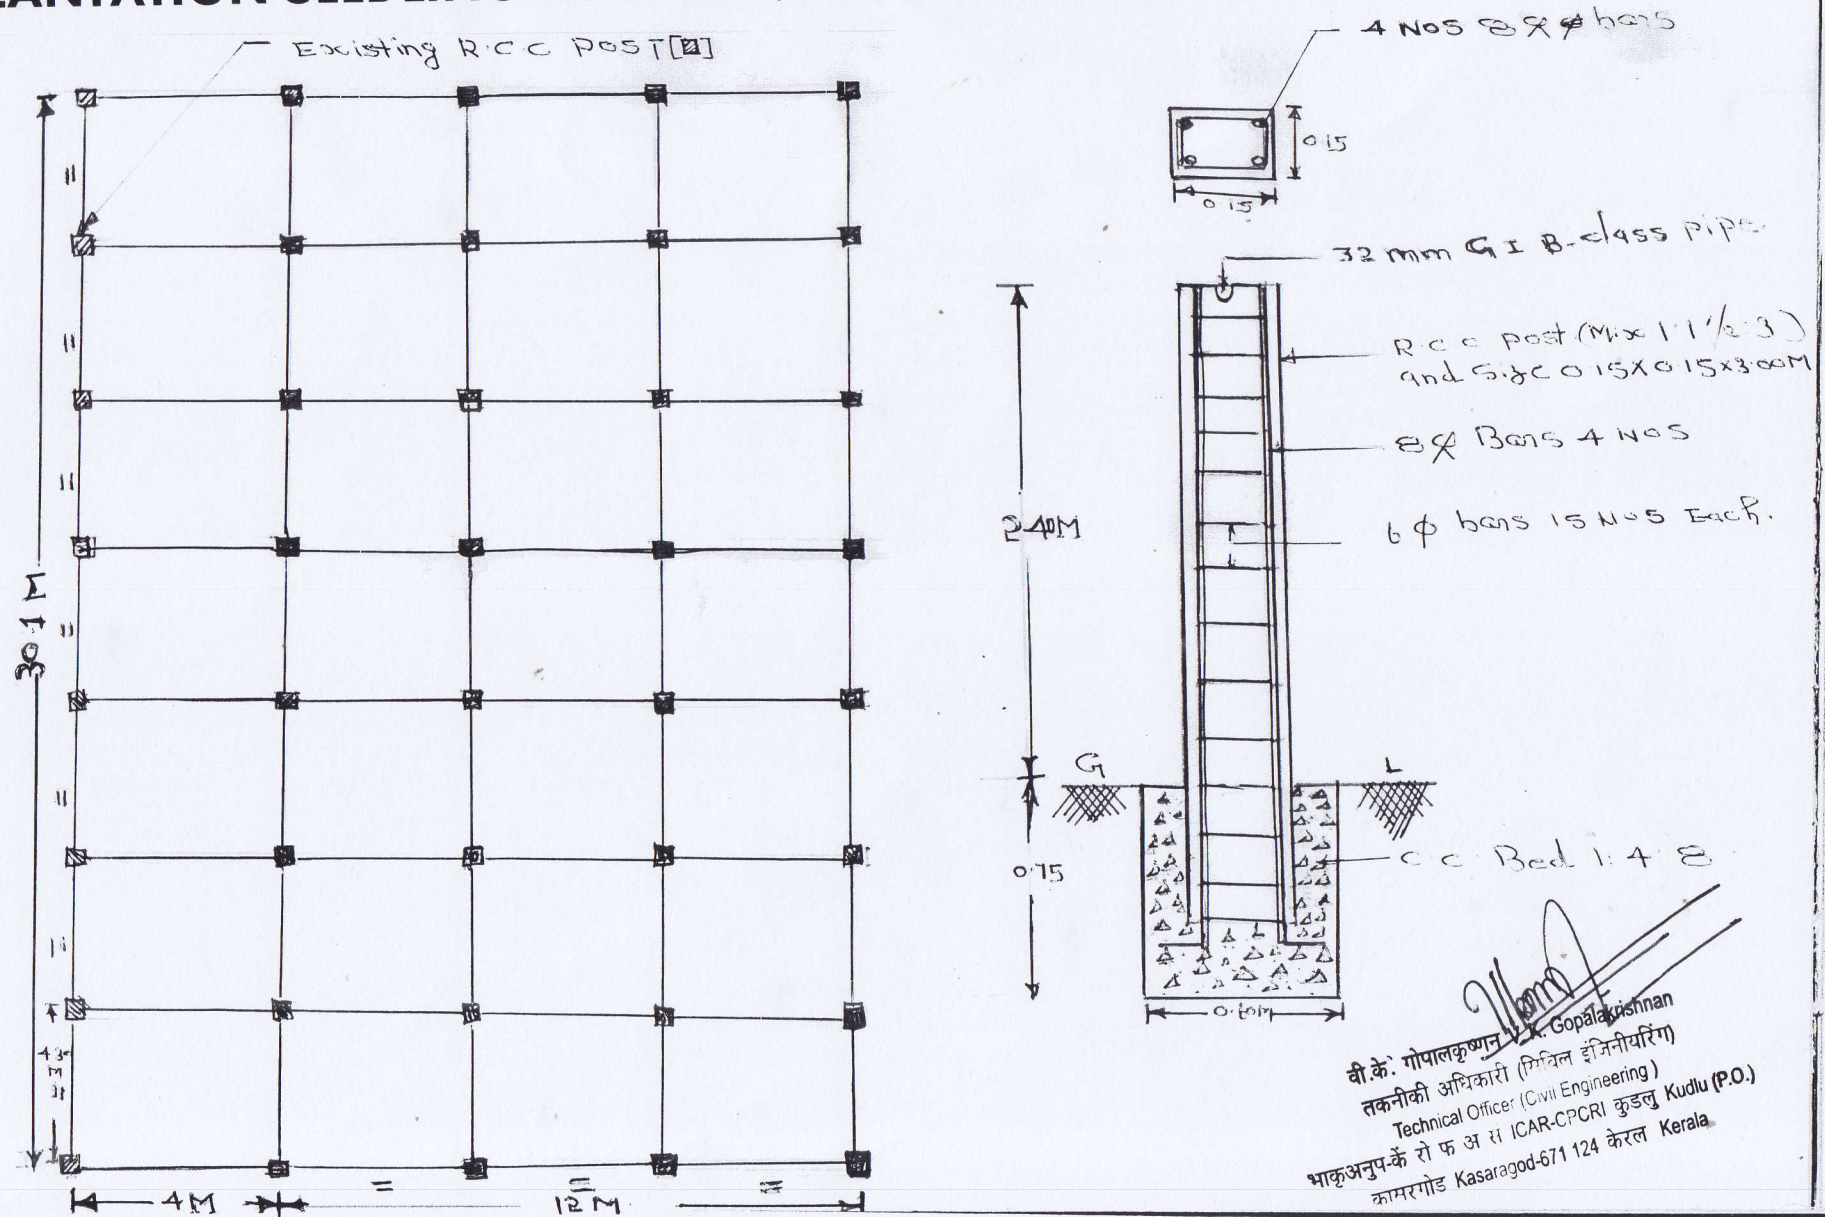

ICAR - CENTRAL PLANTATION CROPS RESEARCH INSTITUTE  
(Indian Council of Agricultural Research)  
KASARAGOD - 671 124, KERALA, INDIA  
(An ISO 9001:2008 Certified Institute)



### Terms & Conditions:-

1. The work should be executed strictly as per the specification/plan to the best satisfaction of the OIC, of this office and decision of the OIC on the work is final and no claims on any nature shall be entertained at any stages.
2. All materials to be used for the work should be got approved before use. Any deviation in this regard entails rejection of material/work executed without assigning any reason thereof.
3. The rates per unit as mentioned in the schedule should be quoted clearly, in figure and words.
4. The quotation received in the schedule and along with 2% EMD of the total quoted amount only will be accepted and considered. The EMD/fixed amount should be remitted by **DD in favour of "ICAR unit, CPCRI Kasaragod" payable at Kasaragod, Kerala** in a separate envelop super scribed as "EMD for Rs. ....for the work "....." and the same should be attached along with the tender.
5. The work will be supervised or measured in terms of standard measuring side by an officer authorized by the OIC of this office. The Director reserves the rights to reject entire tender or part thereof without assigning any reason thereof and his decision in the regard is final.
6. The work will be checked and measured by the estimating authority of the institute and his decision with concurrence of Director in this regard will be final.
7. The work has to be completed within the **stipulated time** from the date of the work order as mentioned in the tender notice. Penalty clause to be imposed @0.25% per month subject to a maximum of 2.5% of the total cost of works if work not completed within the schedule time or mutually extended time.
8. Payment will be made only after satisfactory completion of the whole work. Income tax/ work tax at the applicable rate under rules and regulation will be deducted from the bill. No part payment.
9. Income Tax at@2% for the payment exceeding to Rs.20,000/- will be deducted from the bill.
10. The quotation should remain open for acceptance for a period of 90 days. If any tenderer withdraws his tender before the said period or makes any modification in the terms and conditions of the tenders which are not acceptable to the department, then the Director shall, without prejudice to any other right or remedy be at liberty to forfeit the said earnest money absolutely.
11. Charges of electricity / Water if so availed with the approval of the competent authority will be recovered from the **Final Bill**.
12. Before starting the work, the lowest tenderer should remit **10%** of the tendered amount as performance security which will be released after completion of **defects liability period of six months** from the date of satisfactory completion of work. EMD will be released after receiving performance security.
13. Any instruction given verbally shall be deemed as instruction for the proper execution of the work not involving extra charge.



14. No implements or other facilities, relating to the work will be provide by the institute and also holds no responsibility on the loss, injury, and accident etc., caused during the execution of the work.
15. All the works should be carried out as per CPWD/MES specification. For all the RCC works the contractor should bring the site mechanical vibrator and concrete mixer.
16. Quantities mentioned for the various items in the tender are subject to variation either plus or minus. Tenders are called basically to fix competitive rates.
17. Non-completion of the work or part thereof for any valid reasons within the period prescribed is liable for cancellation and no claims for such works will be entertained under any circumstances and deposits made thereof will be forfeited.
18. One coat of Paint / Distemper / Acrylic emulsion / lime wash etc. shall consists of a stroke of brush form the top downwards another stroke of brush upward and similarly another stroke form right to left and left to right. The second coat shall be repeated in the same manner after the first coat has dried up.
19. The second coat shall be applied only after the approval of the site Engineer/ supervisor and shall be applied after a gap of five hours.
20. The contractor shall himself or appoint one person as site supervisor/ to control the laborers working under him and shall maintain discipline inside the campus.
21. The contractor shall bring along with him, necessary polythene sheets/ tarpaulin to cover the cupboards, library books and other furniture form dust.
22. As far as possible the rooms should be cleaned of all dust paint stains, the same day with minimum obstruction of the office work.
23. The contractors or his workers should not use the office toilets and should not waste the water from the office building.
24. The contractor shall/ should bring his implements like bucket, drums, brushes, waste cloth, ladder stool etc. and shall clean the brushes daily. Only good quality brushes should be used.
25. No turpentine / thinner will be provided for cleaning the brushes. Only recommended thinner should be used for diluting.
26. The institute shall not provide any accommodation. The contractor shall make his own arrangements for stay and the custody of his implements /tools
27. Any defective workmanship found shall be rectified at his cost which may include the material spoilt / wasted paints due to negligence etc.
28. The contractor shall, on written request of the Scientist-in-charge or his representative on the site immediately dismiss form the work any person employed by him thereon, who may in the opinion of the Scientist-in-charge be incompetent or miss-conduct himself and such person shall not again be employed on the works without the written permission of the Scientist-in-charge. Any defective workmanship found shall be rectified at his cost. Prior permission should be obtained for working on closed holidays.
29. The Instituté will not be responsible for any damage/injury caused or occurred during the execution of work.
30. In case the selected contractor fails to execute the work satisfactorily, the performance security is liable to be forfeited.



31. On completion, the contractor shall clean the entire building form within and outside in all respects including cleaning floors, doors, windows, glasses, removing paints stains and drops etc. and generally seeing that the entire building has a clean and neat appearance at the time of handing over.
32. No Part payment is admissible.
33. Tender with any corrections/overwriting by the tenderer is liable to be cancelled. The power to cancel the tender vests with the Director, CPCRI, Kasaragod.
34. Intending tenderer shall visit the site and make himself thoroughly acquainted with the local site condition, nature and requirements of the works, facilities of transport condition effective labour and materials, access and storage for materials and removal of rubbish. The tenderer shall provide in their tender for cost of carriage, freight and other charges freight and other charges as also for any special difficulties and including police restriction for transport etc., for proper execution of work as specified. The successful tenderer will not be entitled to any claim of compensation for difficulties faced or losses incurred on account of any site condition which existed before the commencement of work or which in the opinion of the council, might be deemed to have reasonably inferred to be so existing before commencement of work.
35. The performance security will be released only after the completion of the defects liability period of 6 months provided that the contractor has attended to and rectified all the defects, if any, shown to him from the date of satisfactory completion of the petty work.
36. The contractor shall debit the performance security @ 10% of the tendered amount within 10 days from the issue of work order. This period can be further extended at the written request of the contractor for the period of 10 days with late fee at the rate of 0.1% per day on performance security amount.
37. Contractors must quote rate for each item of work. While selecting if any of the cells is left blank the same shall be treated as '0'. Therefore if any cell is left blank and no rate is quoted by the contractor the rate of such items shall be treated as '0' (Zero) and the item of work shall be done free of cost.
38. The bidders should produce EMD and the following documents in a separate cover, Check list with the bid should be produced in a separate sealed cover. (1) Copy of PAN card, (2) Copy of contractor's license issued by competent authority (CPWD/PWD/MES/BSNL etc.), (3) Extract copy of validity of License (4) Details of AVAT Registration with validity period. Failing which the tender shall be summarily rejected and the above documents are mandatory.

I agree to undertake and execute the works as per the terms and conditions.

EMD remitted Rs..... dated.....

DDNo.....

Signature of the Contractor and address,  
Phone No.